




Turboencabulator

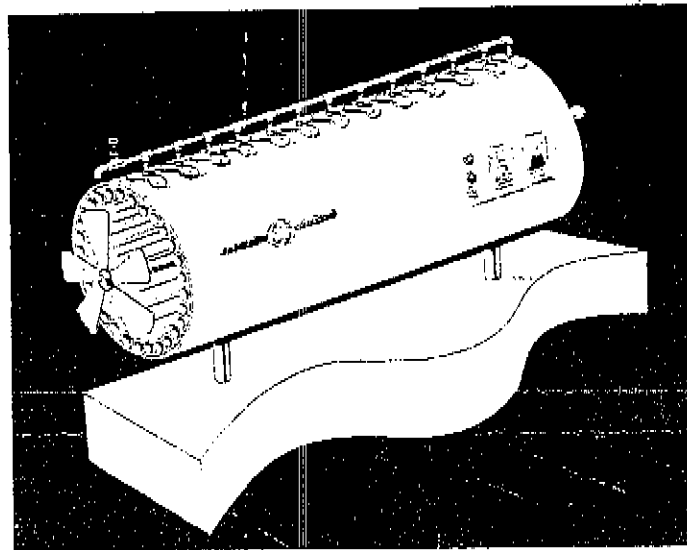

(Photo 2904401)

Fig. 1. Turboencabulator

THIS PUBLICATION CONTAINS INFORMATION ON THE FOLLOWING

- FUNCTION
- RATINGS
- SPECIFICATIONS
- OPERATION
- APPLICATION DATA
- DIMENSIONS
- TECHNICAL FEATURES
- ACCESSORIES
- EXTERNAL WIRING

ADDITIONAL INFORMATION

PRICE AND ORDER DATA—Refer to Factory.

WHERE TO BUY—See Handbook Section No. 8006, or contact person listed below.

WHERE TO GET SERVICE OR REPAIR—See Handbook Section No. 8009, or contact person listed below.

(Sales Engineer's or Distributor's Name and Address)

GENERAL  ELECTRIC

TECHNICAL PUBLICATIONS

Order from nearest General Electric Apparatus Sales Office or Distributor.

Copies of this publication	HBK 8359
Specification Guide Forms (Nonrestrictive) with copy of General Electric Specifications, printed herein.....	None
Installation Instructions.....	None
Operation and Service Instructions.....	None
Service Manual.....	None
Overhaul Instructions.....	None
MIL-illustrated Parts Breakdown.....	None
Recommended Spare Parts List.....	None
Renewal Parts Bulletin.....	None

New information.

CW30, A77 Tabs

Data subject to change without notice

Turbo-
encab-
ulator

Dec. 31, 1962

Turboencabulator

FUNCTION

To measure inverse reactive current in unilateral phase detractors with display of percent realization.

OPERATION

Based on the principle of power generation by the modal interaction of magnetoreluctance and capacitive directance, the Turboencabulator negates the relative motion of conventional conductors and fluxes. It consists of a baseplate of prefabulated Amulite, surmounted by a malleable logarithmic casing in such a way that the two main spurving bearings are aligned with the pentametric fan.

Six gyro-controlled antigravic marzelvanes are attached to the ambifacient wane shafts to prevent internal precession. Along the top, adjacent to the panandermic semi-boloid stator slots, are forty-seven manestically spaced grouting brushes, insulated with Glyptal-impregnated, cyanoethylated kraft paper bushings. Each one of these feeds into the rotor slip-stream, via the non-reversible differential tremie pipes, a 5 per cent solution of reminative Tetraethylidohexamine, the specific pericosity of which is given by $P = 2.5C_n^{6/7}$ where "C" is Cholmondeleys annular grillage coefficient and "n" is the diathetical evolute of retrograde temperature phase disposition.

The two panel meters display inrush current and percent realization. In addition, whenever a barescent skor motion is required, it may be employed with a reciprocating dingle arm to reduce the sinusoidal depletion in nofer trunions.

Solutions are checked by Zahn Viscosimetry techniques. Exhaust orifices receive standard Blevinometric tests. There is no known Orth Effect.

TECHNICAL FEATURES

- Panandermic semi-boloid stator slots
- Panel meter covers treated with Shure Stat (guaranteed to build up electrostatic charge in less than 1 second).
- Manestically spaced grouting brushes
- Prefabulated Amulite baseplate
- Pentametric fan

STANDARD RATINGS

Rating	Old Catalog No.	New Computer Insensitive Catalog No.
0-1000	6060606G6*	125387GLC1†

* Included Qty. 6 NO-BLOJ fuses.

† Includes Magnaglas circuit breaker with polykrapolene-coated contacts rated 75A Wolfram.

‡ Reg. *T.M. Little Gem Fuse Blower Corp.

ACCESSORIES

1. 8 ounces 5 per cent Tetraethylidohexamine with 0.01N Halogen tracer solution.
2. Interelectrode diffusion integrator.
3. Noninductive-wound inverse conductance control in little black box.
4. Analog to digital converter with reflected levorotatory BCD output (binary-coded decimal ie; 7, 4, 2, 1).
5. Quasistatic regeneration oscillator with output conductance of 17.8 millimhos.

APPLICATION

Measuring Inverse Reactive Current

CAUTION: Because of the replenerative flow characteristics of positive ions in unilateral phase detractors, the use of the quasistatic regeneration oscillator is recommended if Turboencabulator is used in explosive atmospheres.

Reduction of Sinusoidal Deplenration

—Before use, the system should be calibrated with a gyro-controlled Sine-Wave Director, the output of which should be of the cathode follower type.

Note: If only Cosine-wave Directors are available, their output must be first fed into a Phase Inverter with parametric negative-time compensators. **Caution:** Only Phase Inverters with an output conductance of 17.8 ± 1 millimhos should be employed so as to match the characteristics of the quasistatic regeneration oscillator.

Voltage Levels—Above 750V Do Not Use Caged Resistors to get within self-contained rating of Turboencabulator. Do Use Sequential Transformers. See HBK-8005.

Multiple Ratings—Optionally available in multiples of $\pi(3.141593)$ and $e(2.71828)$. If binary or other number-base systems ratios are required, refer to factory for availability and pricing.

Goniometric Data—Upon request, curves are supplied, at additional charge, for regions wherein the molecular MFP (Mean free path) is between 1.6 and 19.62 Angstrom units. Curves, relevant to regions outside the above-listed range,

may be obtained from:

Toricelli Barometer Works, Ltd.
Toroidal Turboencabulator Dept.
(TTD-3)
London W.C. 1, England.

In Canada address request to:

Turboencabulateurs
Canadien-Francais Ltee.
468 Jean de Quen, Quebec 10, P.Q.

Reference Texts

1. Zeitschrift fur Physik
Der Zerfall von Dunge LBM-1
H. Sturtzkampfleger, Berlin
2. Svenska Teckniska Skatologika Laro-
varken
Dagblad 121—G. Petterson &
W. Johannson, Stockholm
3. Journaux de l'Academie Francaise
Numero 606B
T. L'Ouverture, Paris
4. Szkola Polska
Turboencabulatorskiego
Ogloszenie 1411-7
Bogumiel Wroblyski, Warszawa.
5. Texas Inst. of Turboencabulation
AITE Bull. 312-52, J. J. Fleck, Dallas.

SPECIFICATIONS

Accuracy: ± 1 per cent of point

Repeatability: $\pm \frac{1}{4}$ per cent

Drift: less than 3 ft²-hrs./mo

Maintenance Required: Bimonthly treatment of Meter covers with Shure Stat.

Ratings (Standard): None

Ratings (Optional): All

Input Power: Volts—120/240/480/550 a-c
Amps—10/5/2.5/2.2 A
Watts—1200 W
Wave Shape—Sinusoidal
Cosinusoidal, Tangential or
Pipusoidal.

Operating Environment:

Temperature 32F to 150F (0C to 66C)

Max Magnetic Field: 15 Mendelsohns
(1 Mendelsohn = 32.6 Statoersteds)

Case:

Material: Amulite; Tremie-pipes are of
Crapaloy—(tungsten cowhide)
Weight: Net 134 lbs.; Ship 213 lbs.

DIMENSION DRAWINGS

On delivery.

EXTERNAL WIRING

On delivery.

Data subject to change without notice